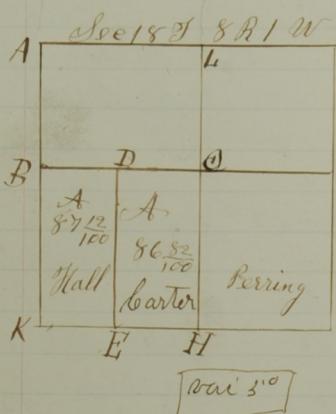


March 19th 1852

Surveyed in Section 18 S 8 R 1 W
for Thomas Carter and others
Established the following corners
corner O center of Section Beech 18 in
in diameter S 29° E 20 lks. Sugar 12 in
in diameter S 8° W 54 lks.

corner D center on north end of S W gr
White Oak 24 S 62½° E 49 lks
Hickory 80 S 18° W 60

corner B middle of line on west side
(variation 5°)

+ Line O. B. 171 72 White oak 20 S 2° W 20 lks. distant
.. H. K. 172. 72 White oak 18 S 52° E 82. ..
.. D. E. 161 (another line measured)
A. K. 322. 67

corner E Walnut 42 N 45° W 44 lks. Sugar 14 N 40° E 63°
.. H The original witness tree Standing Stone planted
.. A NW corner of Section Poplars 8 S 2° W 32 poplars 16 N 30° E 37 lks
.. L 1/2 m p Sugar 18 S 8° W 35 lks
Stone Set at all the corners
Edward Borland / chain bearer
James Borland / Sworn

James Woodburn
M. S.

Sec 25 S 10 R 1 W



April 8 1852

Surveyed for C Matlock
John Sullivan & John Martin
in Section 25 S 10 R 1 W and
established the following corners
corner A N E corner of west half N 00° 91'
Wit tree Hickory 20 S 24° E 42 links
W oak 30 N 68° E 22 lks distant

Cor B S E corner west half of the N W gr
wit tree Beech 18 N 49½° E 26 links
Beech 8 N 83° E 33 lks

Cor O S E cor N W 1/4 of S W gr of Section
wit tree Beech 12 N 43° E 23 lks Beech 10 N 72° W 42 lks

Cor C center of Section wit tree Bur oak 24 S 23° E 41 lks
Hickory 8 S 72° W 22 lks

Mark Payne & Jno Payne } Chain bearer
Conrad Walls & John Sullivan } Sworn

James Woodburn
M. S.